

Material & Engineering Laboratory-Taipei

TEST REPORT



REPORT NO. : HV-16-00494XA

PAGE : 1 OF 3

REPORT DATE : Mar. 01, 2016

CHUNG TAI SING CHEMICAL INDUSTRIAL.CO,LTD

NO.8, LANE 207, NEOPU SOUTH RD., HSINCHU, TAIWAN, R. O. C.

The following merchandise was submitted and identified by the vendor as :

Product Name : PUFF DINO PU FOAM

Product Type : PU(DR)

Product Color : OFF-WHITE

Manufacturer/Vendor : CHUNG TAI SING CHEMICAL INDUSTRIAL.CO,LTD

We have tested the submitted sample(s) as requested and the following results were obtained :

Test Required : (According to client's test specification, please see following sheets in detail.)

Combustibility test

Test Result :

-PLEASE SEE ATTACHED SHEETS-

Date of Receive : JANUARY 26, 2016

Date of Testing : JANUARY 26, 2016 ~MARCH 01, 2016



Signed for and on behalf of
SGS Taiwan Ltd.

The content of this PDF file is accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company. 此 PDF 電子檔內容係根據原簽發之紙本報告製作，僅供參考用。本報告未經本公司書面同意，不可部份複製。

TEST REPORT



REPORT NO. : HV-16-00494XA

PAGE : 2 OF 3

REPORT DATE : Mar. 01, 2016

Combustibility test

Test Equipment :

Name	Brand	Model
Horizon Vertical Flame Chamber	ATLAS	HVUL2

Lab Environmental Conditions :

Ambient temperature : 23±2°C
Relative humidity : 65±5%RH

Test Method/ Specification :

CNS 7774(1981) Rigid Foam Urethane for Heat Insulating

Test Result :

Test Item(s)	Specimen					Requirement(s)
	1	2	3	4	5	
Thickness (mm)	12.83	11.96	13.05	12.22	13.79	-
Combustion time(sec)	101.8	100.4	98.3	84.2	99.4	Within 120
Combustion length(mm)	56	55	50	48	55	Shorter than 60

TEST REPORT




REPORT NO. : HV-16-00494XA

PAGE : 3 OF 3

REPORT DATE : Mar. 01, 2016

Test Photo :

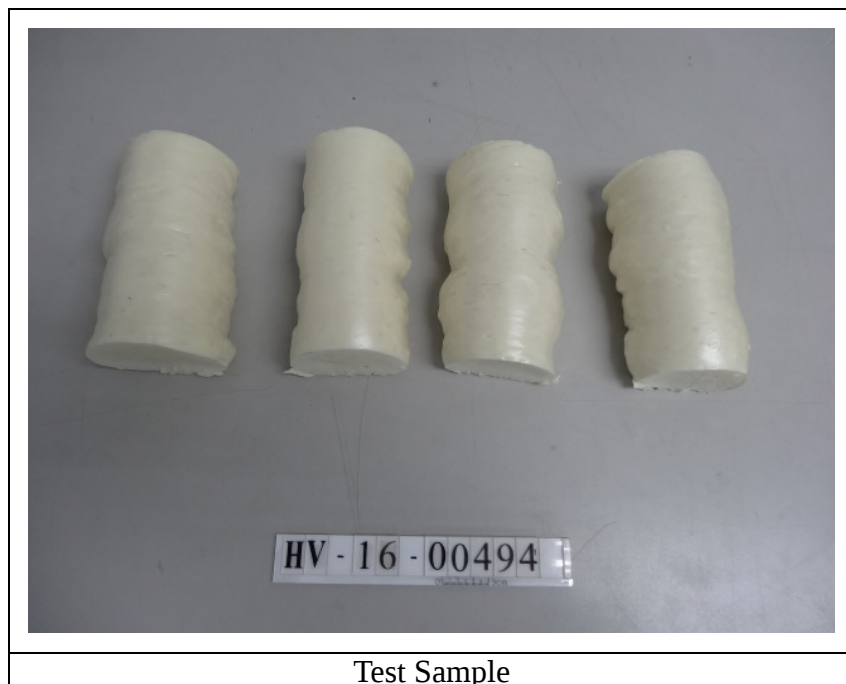

----- o O o -----